


ONDATECH

ONDATECH ; Ciciriello Srl, S.P. 231 Km 49.700, 76123 ANDRIA (BT)
assistenzaondaluce@ciciriellogroup.com


Model: OTPBCTDN/OTPBCTDG/OTPBCTDN27K/OTPBCTDG27K

INPUT Voltage: DC 48V


ATTENTION: YOU HAVE TO CUT OFF THE POWER BEFORE INSTALLING THE LAMP
ATTENZIONE: PRIMA DI INSTALLARE IL CORPO LUMINOSO TOGLIERE LA CORRENTE




"CLICK"




RIPOSIZIONABILE
REPOSITIONABLE

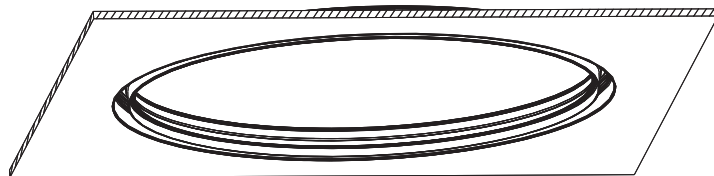



"CLICK"



1
IT-Aprire la scatola
EN-Open the box

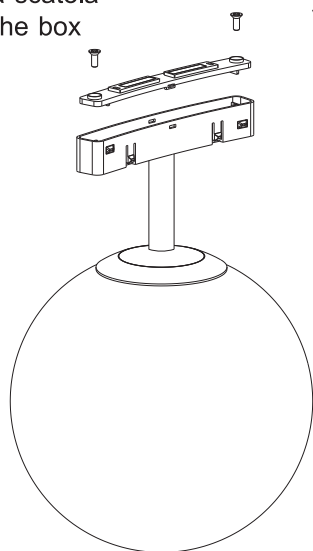

2
IT-Rimuovere i contatti linea1 o linea2 , togliendo la molla.Spingere i contatti verso l'interno e isolarli.
EN-Remove the line 1 or line 2 contacts by removing the inner spring. Push the contacts inward and isolate them.

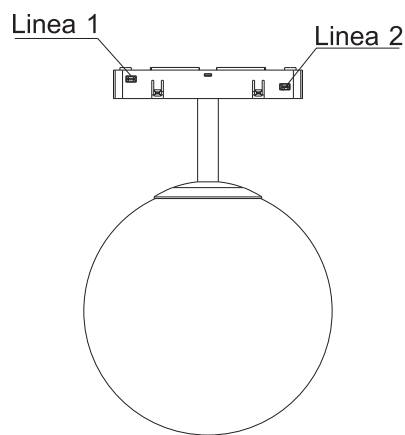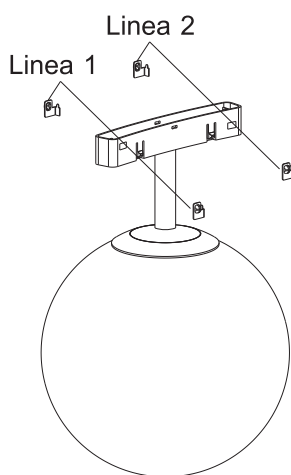

Compatible with RING tracks (OTBINCS80G/OTBINCS80N, OTBINCS100G/OTBINCS100N, OTBINCI80N, OTBINCI100N) and curved connections of SQUARE tracks (OTCUSG/OTCUSN, OTCR30SG/OTCR30SN, OTCUIN, OTCR30IN)

Compatibile con i binari RING (OTBINCS80G/OTBINCS80N, OTBINCS100G/OTBINCS100N, OTBINCI80N, OTBINCI100N) e con le connessioni curve dei binari SQUARE (OTCUSG/OTCUSN, OTCR30SG/OTCR30SN, OTCUIN, OTCR30IN)



Classe efficienza energetica
Energy Efficiency Class