

ONDATECH


ONDATECH ; Ciciriello Srl, S.P. 231 Km 49.700, 76123 ANDRIA (BT)

assistenzaondaluce@ciciriellogroup.com

Model:OTPBTDDB/OTPBTDN/OTPBTDG/


OTPBTDDB27K/OTPBTDN27K/OTPBTDG27K

INPUT Voltage: DC 48V






ATTENTION: YOU HAVE TO CUT OFF THE POWER BEFORE INSTALLING THE LAMP

ATTENZIONE: PRIMA DI INSTALLARE IL CORPO LUMINOSO TOGLIERE LA CORRENTE

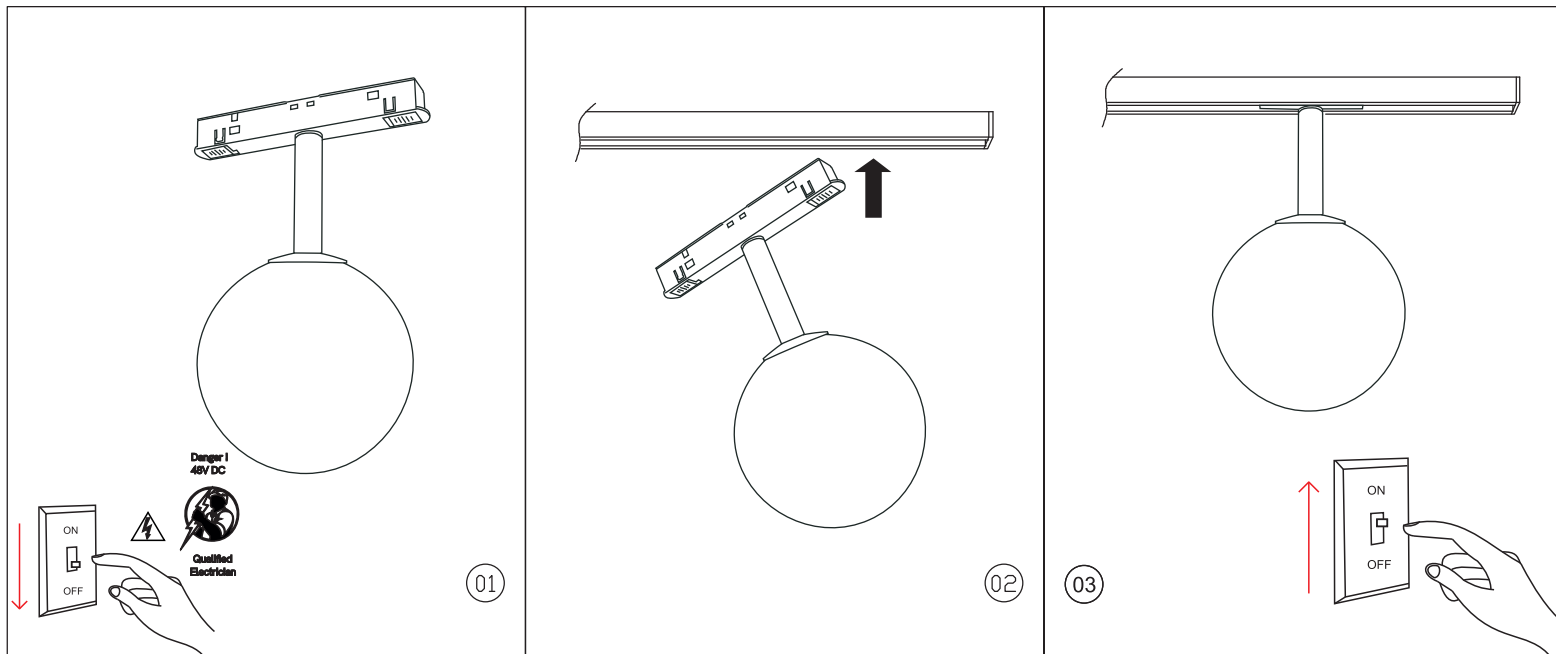

1
IT-Aprire la scatola
EN-Open the box

2
IT-Rimuovere i contatti linea1 o linea2 , togliendo la molla.Spingere i contatti
verso l'interno e isolarli.
EN-Remove the line 1 or line 2 contacts by removing the inner spring.
Push the contacts inward and isolate them.

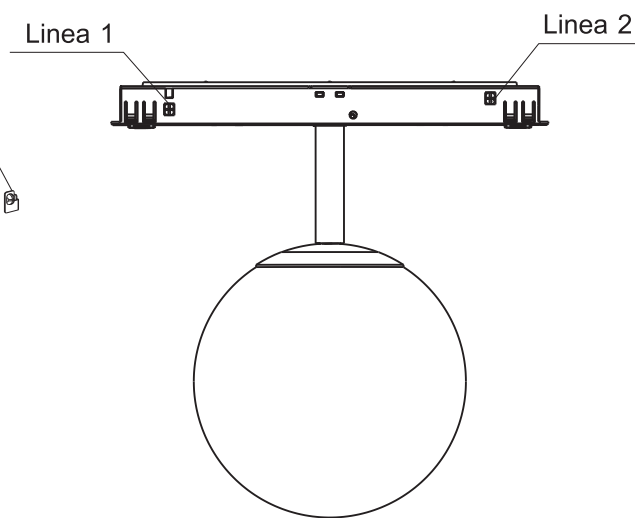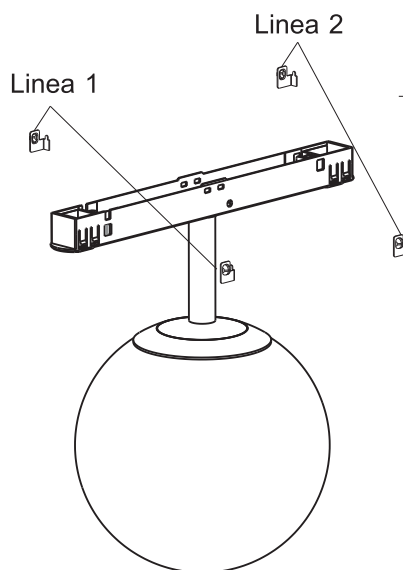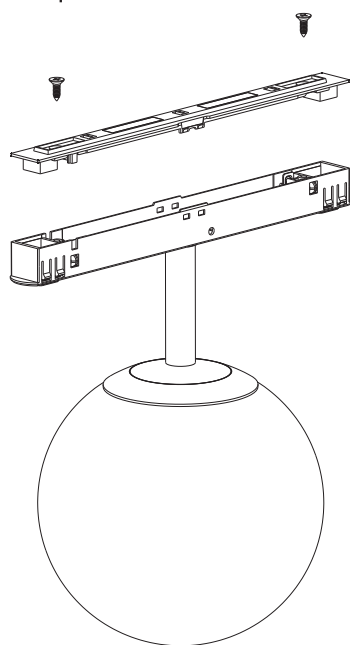

COMPATIBLE WITH ROUND TRACKS (OTBINCN/OTBINCB), TRANSVERSE
ROUND ELEMENT (OTPERCN/OTPERCB), SQUARE RECESSED AND SURFACE
TRACKS (OTBININ/OTBINIB, OTBINSN/OTBINSB/OTBINSG)

COMPATIBILE CON BINARI ROUND (OTBINCN/OTBINCB), ELEMENTO ROUND
TRAVERSO (OTPERCN/OTPERCB), BINARI SQUARE AD INCASSO E A SUPERFICIE
(OTBININ/OTBINIB, OTBINSN/OTBINSB/OTBINSG)



Classe efficienza energetica
Energy Efficiency Class